

ROKK Wireless Charge Bezel (SC-CW-03E)

Parts List

	Charger	x1
	Bezel & gasket	x1
	No6 x 1/2" self tapping screw	x3

Technical information

Input voltage range :	10-30V DC (12/24V system)
Input current max:	1.5A
Output power:	5W (5V, 1A)
Standby current draw:	< 0.03W
Certifications:	Qi, CE, FCC, ROHS
Waterproof rating:	IPX6 front and back

	Alcohol Wipe	x1
---	--------------	----

Tools Required


	10mm (3/8") Drill
	Power drill
	1.6mm (1/16") Drill

  READ THE IMPORTANT SAFETY INFORMATION LEAFLET BEFORE INSTALLING


**1** Drill hole 10mm (25/64").



**2** Place charger and Bezel over hole to mark screw centres. **\*\*Caution\*\***  
Do not remove self adhesive backing from tape, dry fit only.




**3** Remove and mark hole centres in bezel.




**4** Drill 3x 1.6mm (1/16") pilot holes.




**5** Screw Bezel to surface.

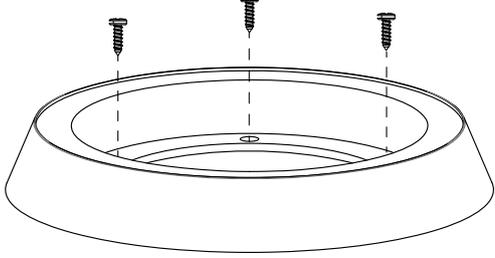

**6** Remove self adhesive backing from charger.

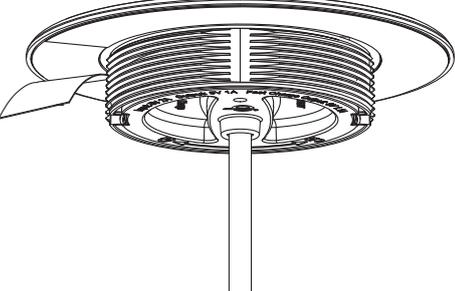

**7** Install charger into bezel.

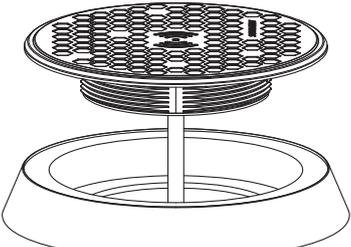

**8** Connect wires to 12-24V supply, ensuring a waterproof connection. Fuse appropriately according to input voltage and current.

