

➤ Instructions

Thule Lift V16


307368

Thule Lift V16 Manual XL

302060

Thule Lift V16 Manual XL 50D

302061

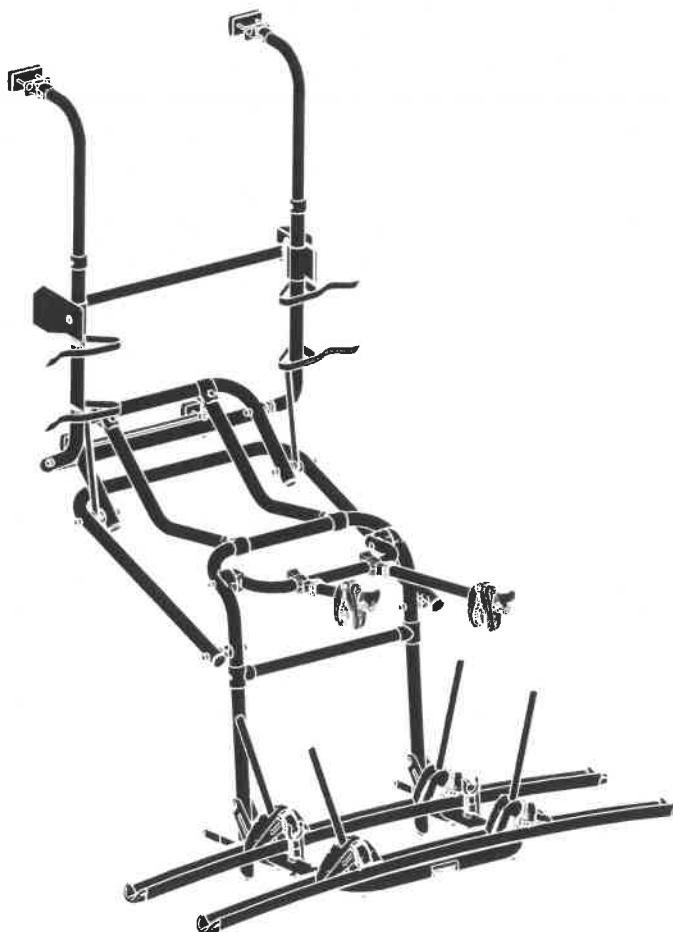

EN Rear wall-mounted bike carrier

DA Cykelholder monteret på bagvæg

DE Rückwandfahrradträger

NO Fietsendrager voor montage op de achterwand

NL Fietsendrager voor montage op de achterwand

PL Bagażnik rowerowy montowany na tylnej klapie



FR Porte-vélos sur paroi arrière

IT Portabici da parete posteriore


ES Portabicicletas montado en la pared trasera

SV Cykelhållare monterad på den bakre väggen


FI Takaseinään kiinnitettävä polkupyöräteline

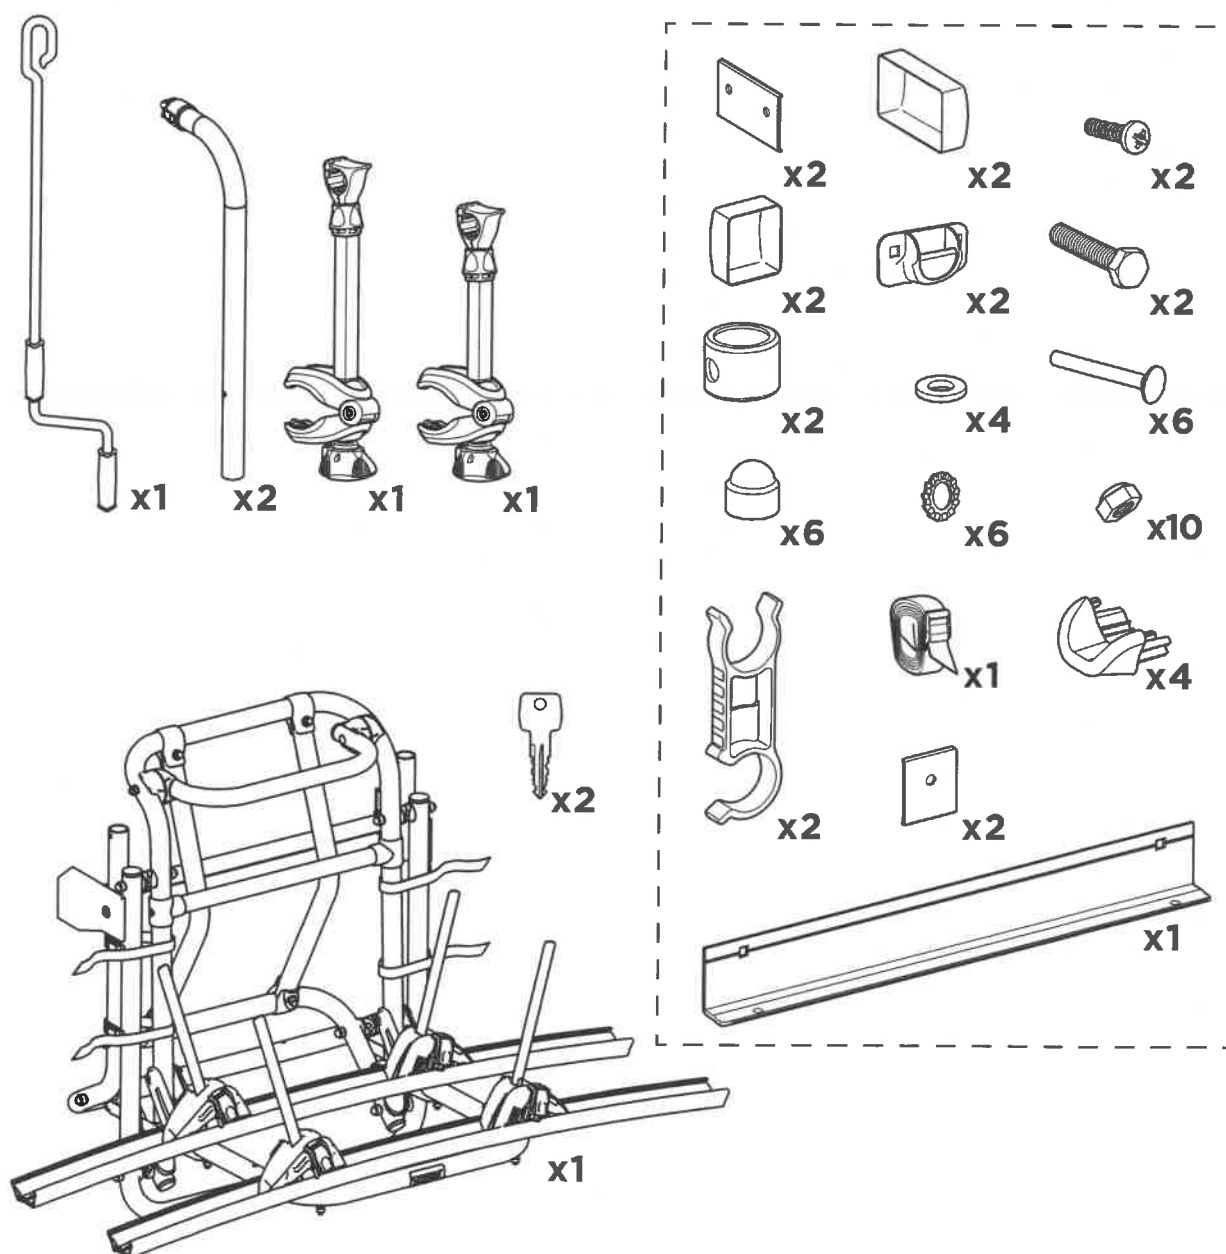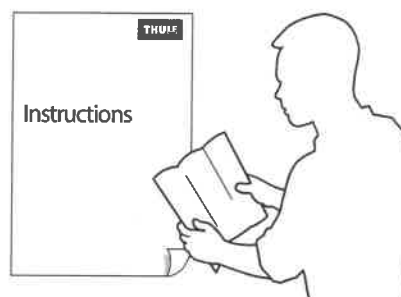


i

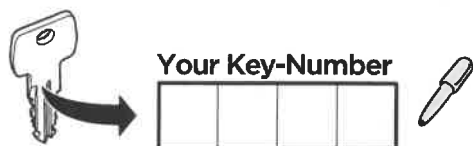


307368	17 kg
302060	17.3 kg
302061	17.4 kg

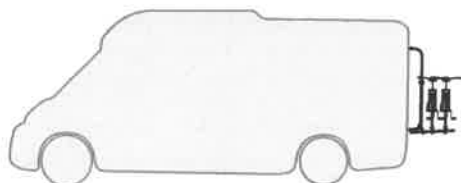


Carbon Frame

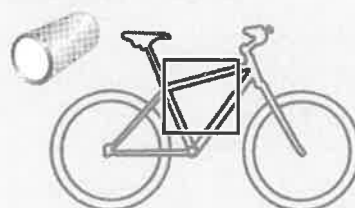


Thule Carbon Frame Protector 984




1



x2



x2



x2





x4




x4



x4

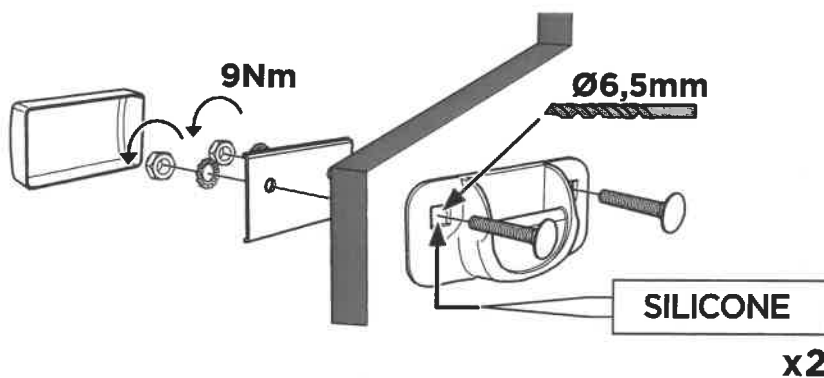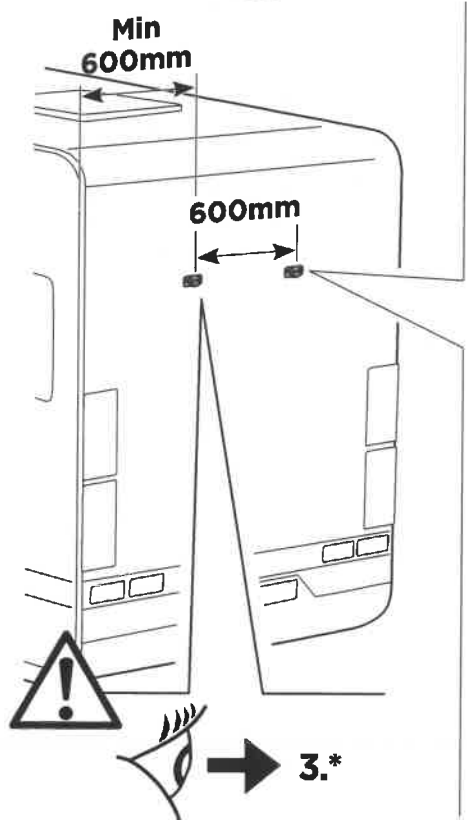

i

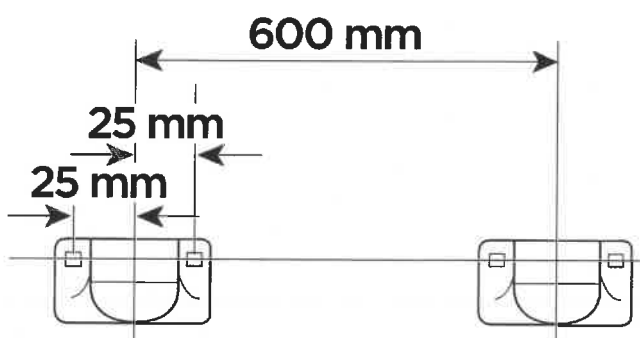

2

For 750 to 950 mm



x2



x2



x2



x2



A





C




B

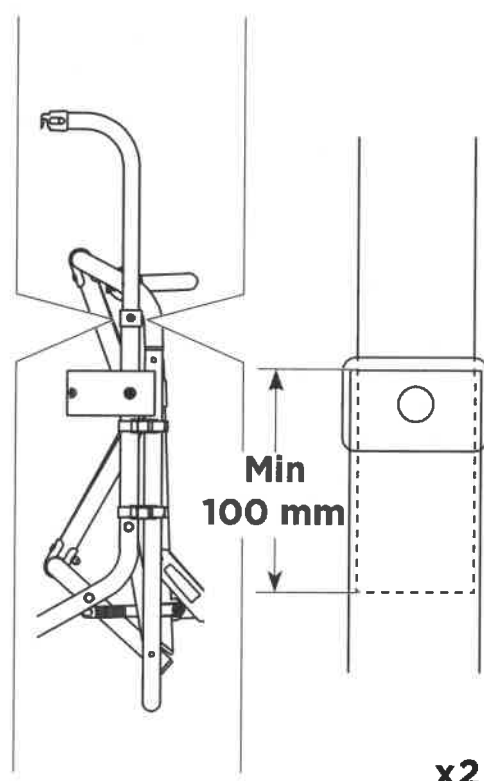


3

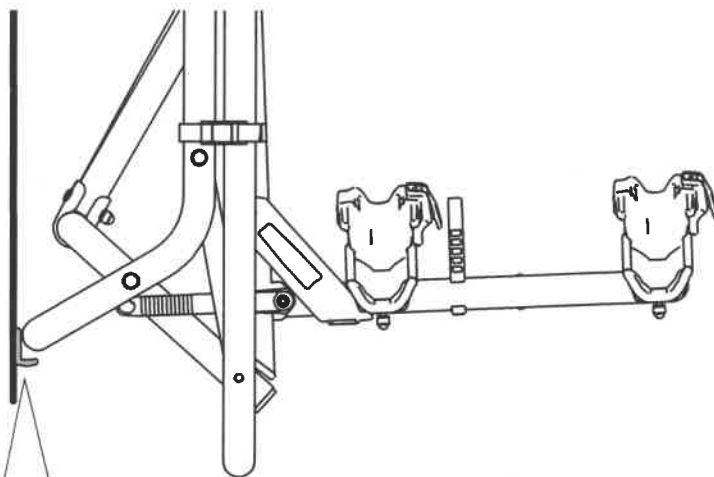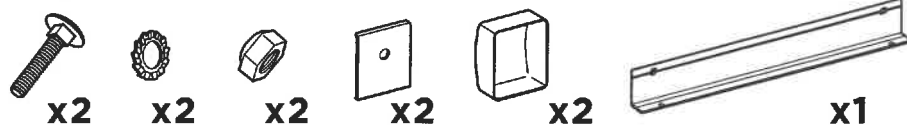


A

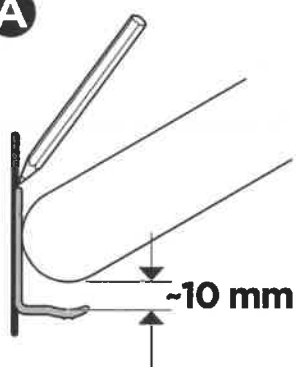


B

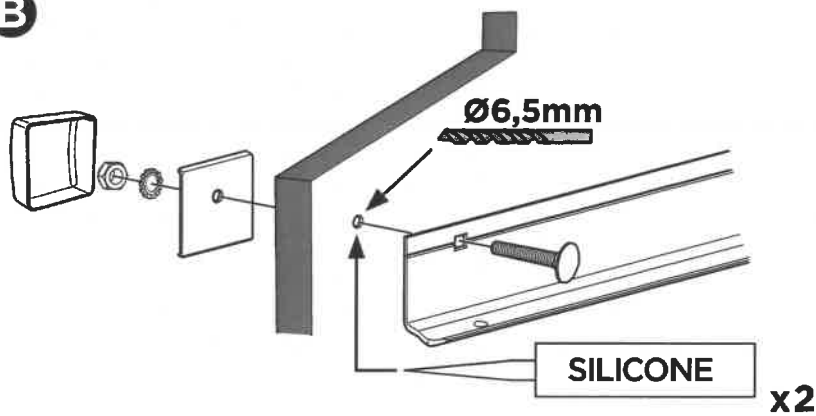


4

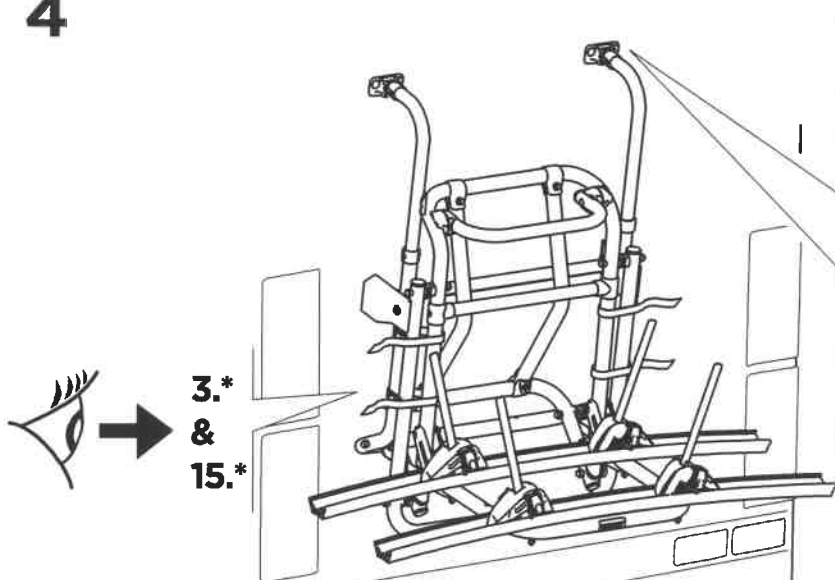


A





B



5



x2 x4 x2 x4

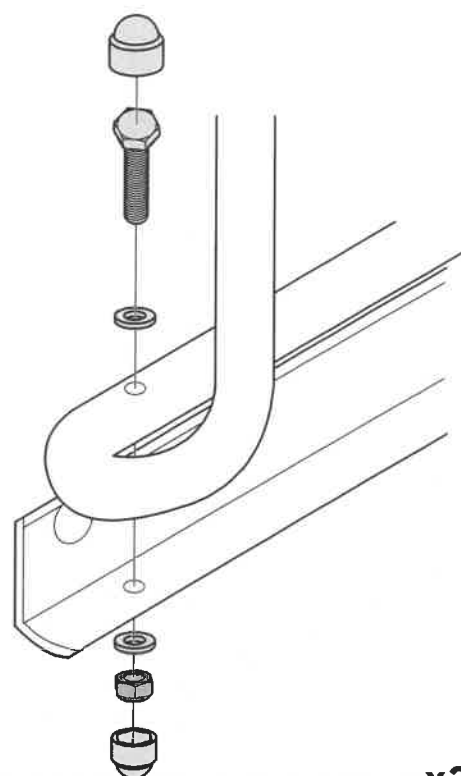
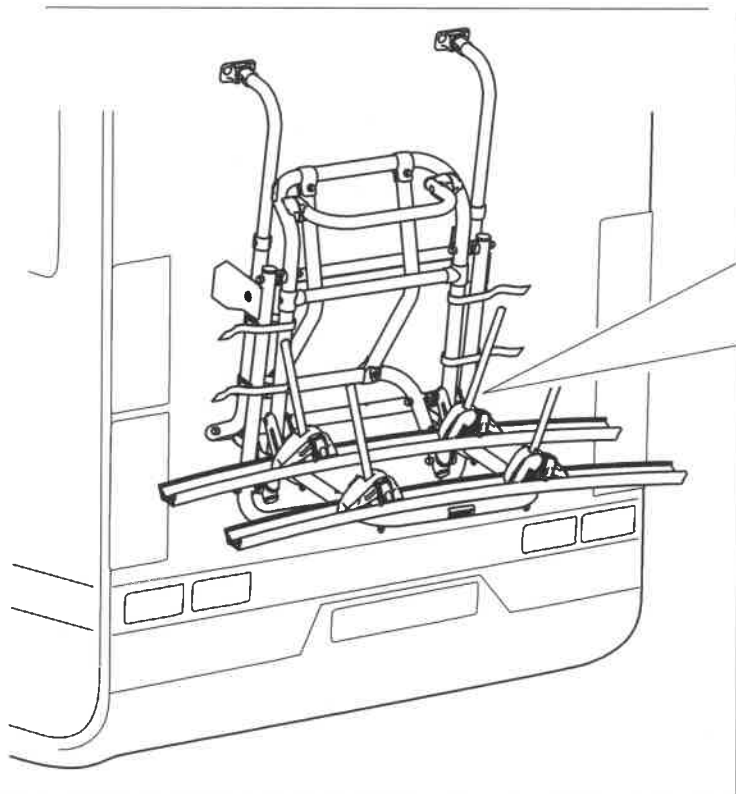


x2

6




x4

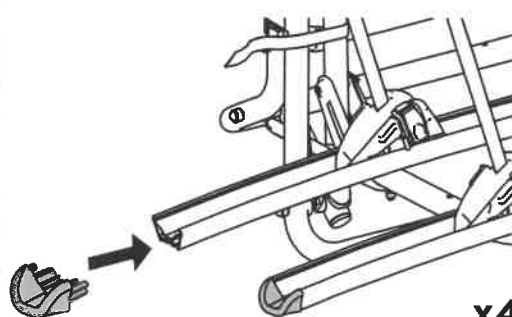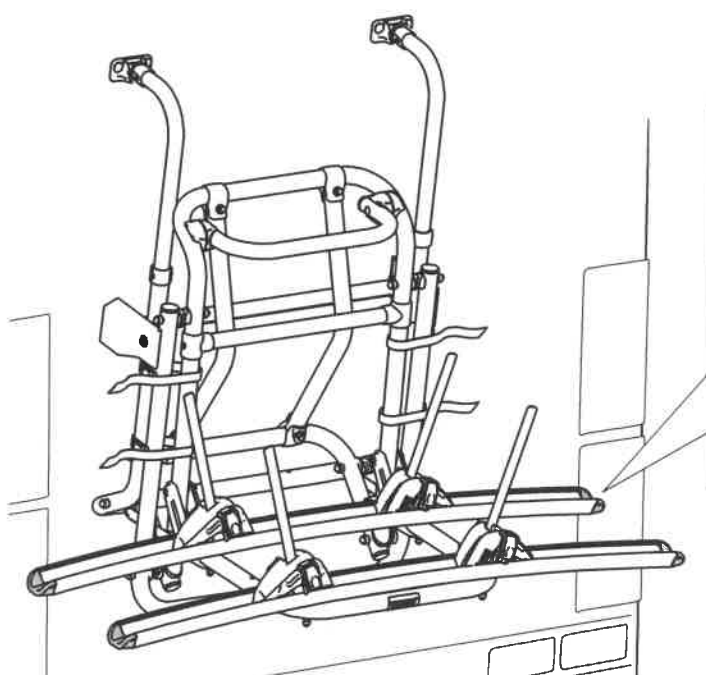


x4



7

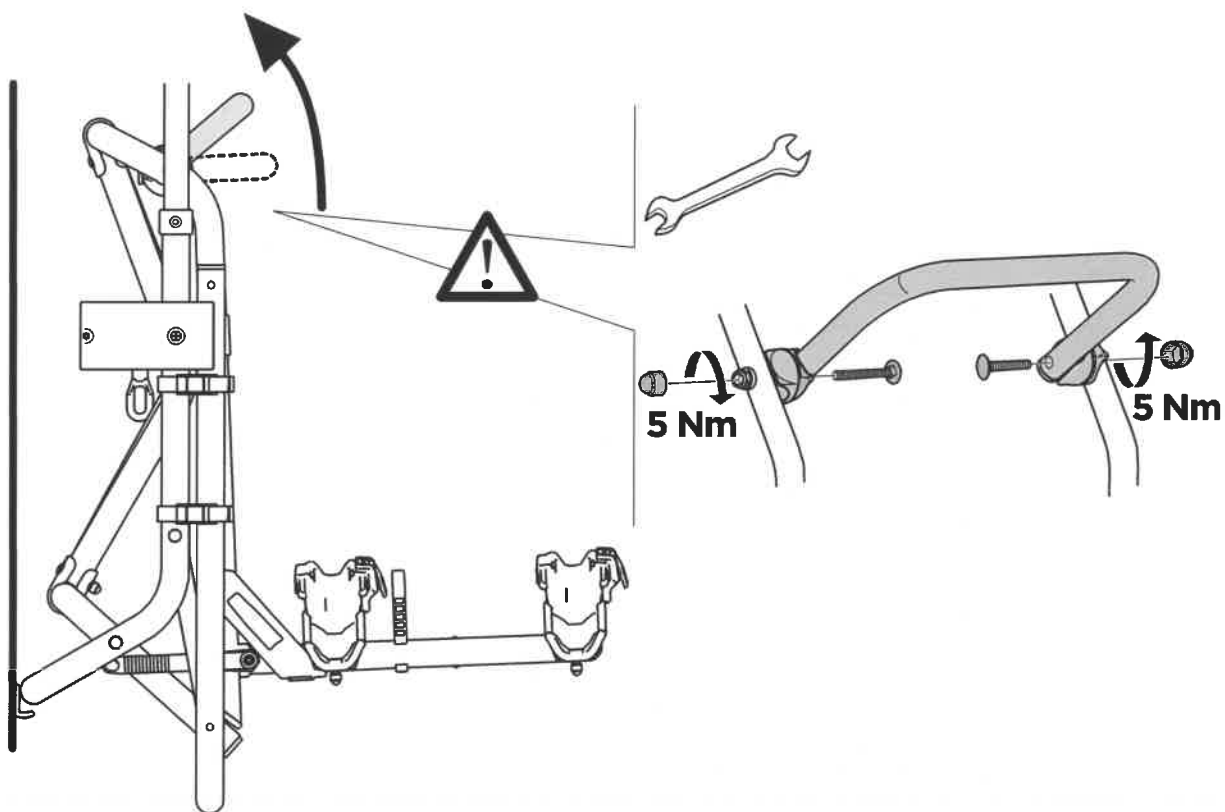




8

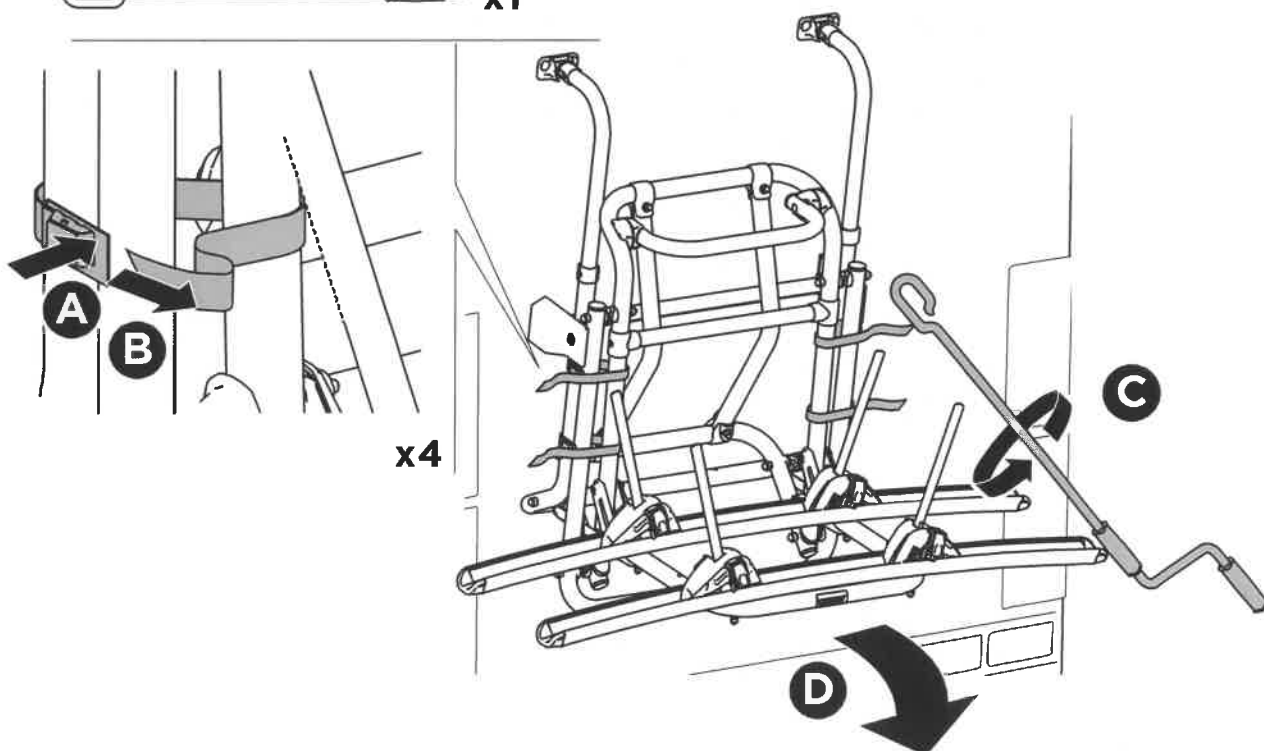



9

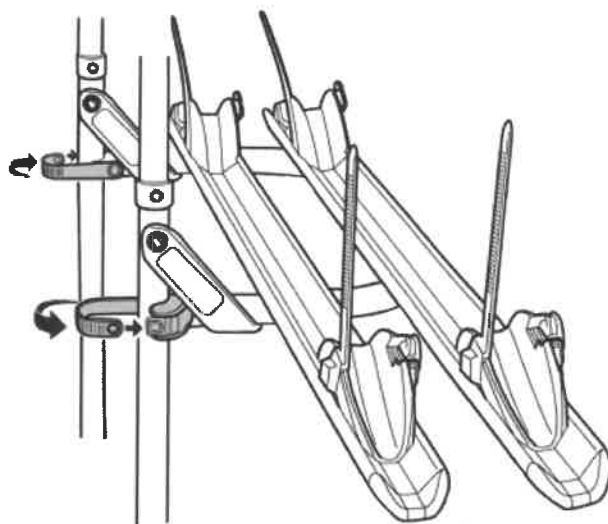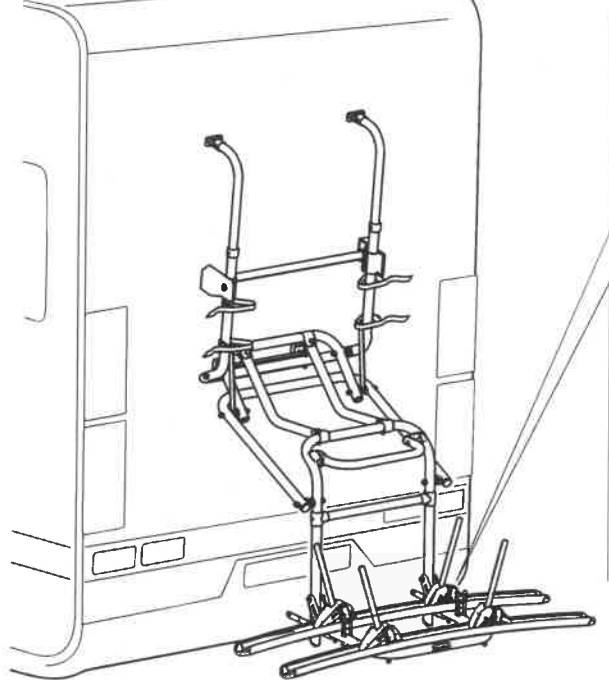


10

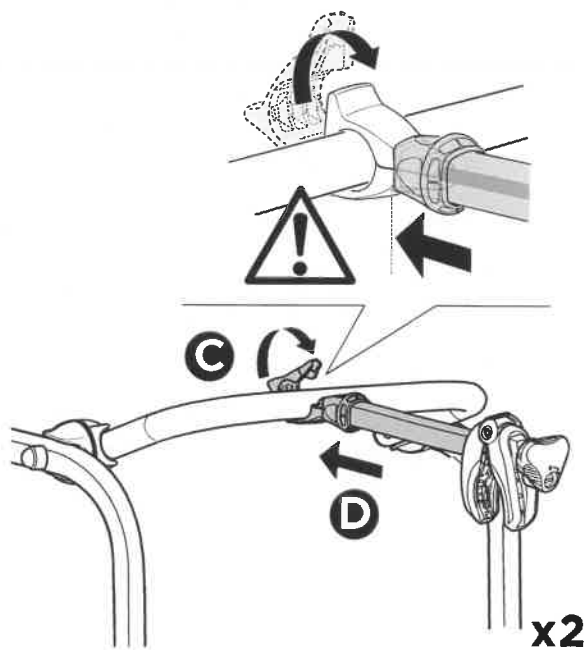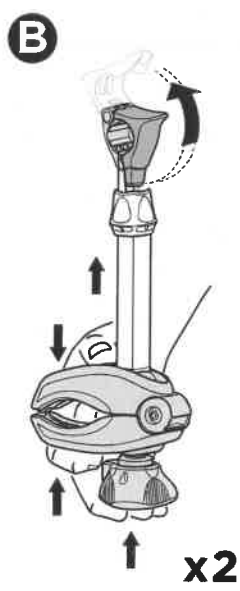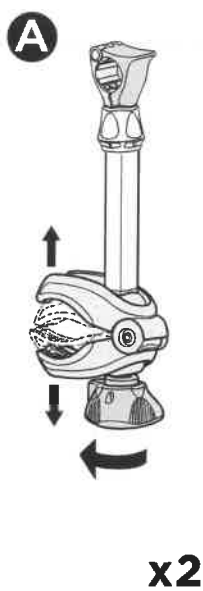


i

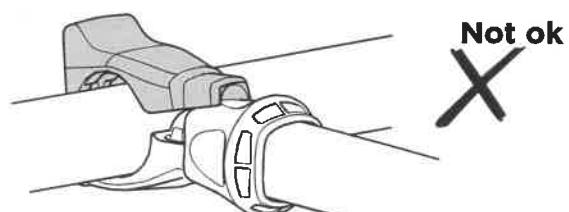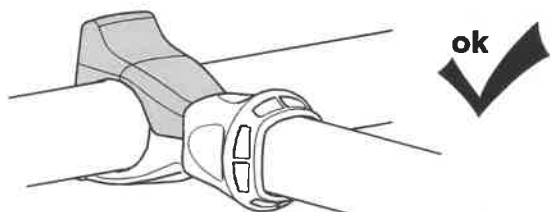


i

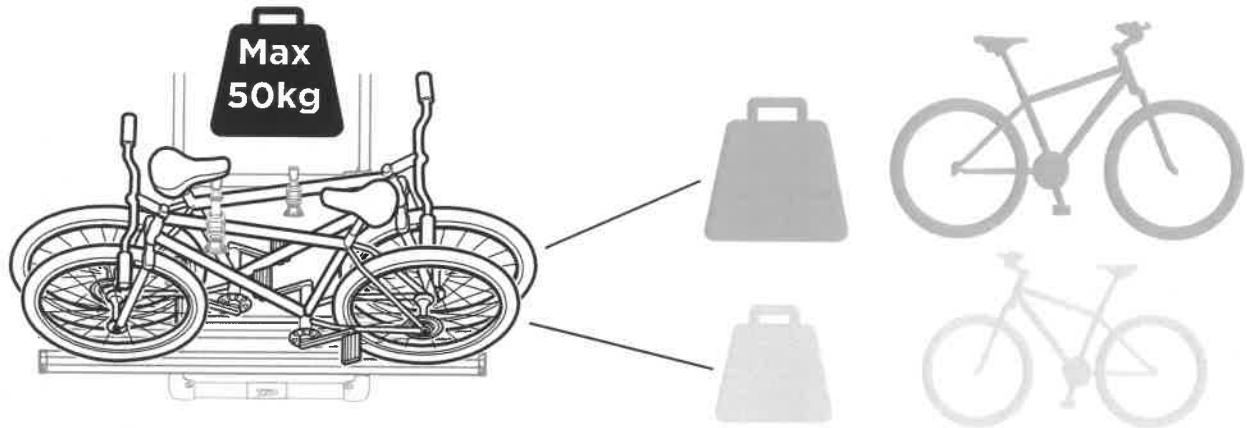


11

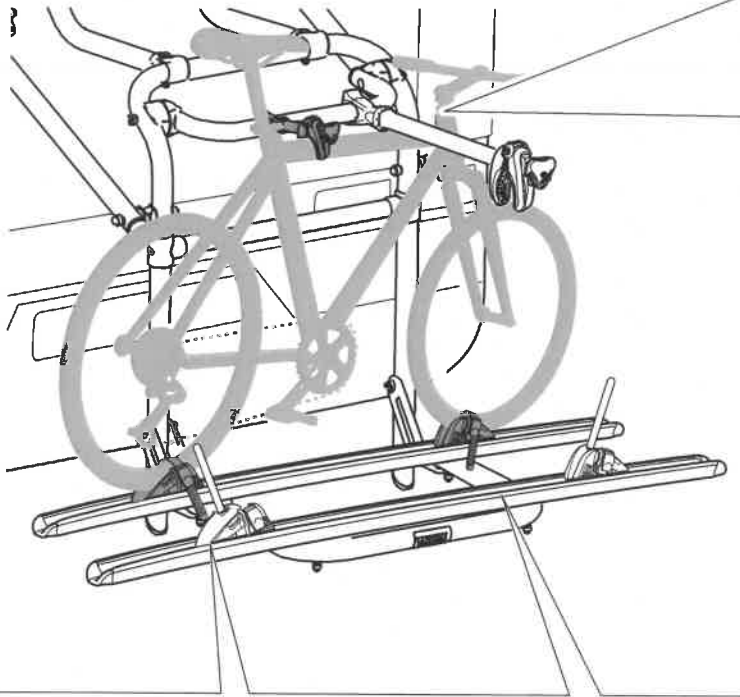


A

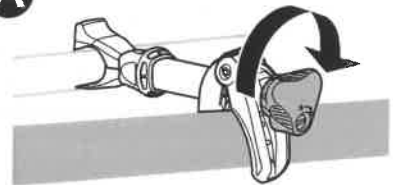


B

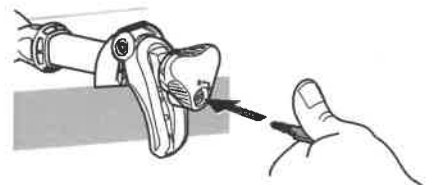


C

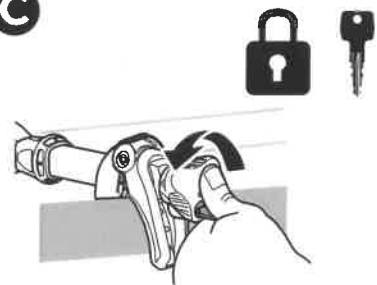


D

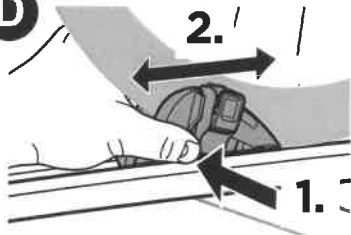


E




12

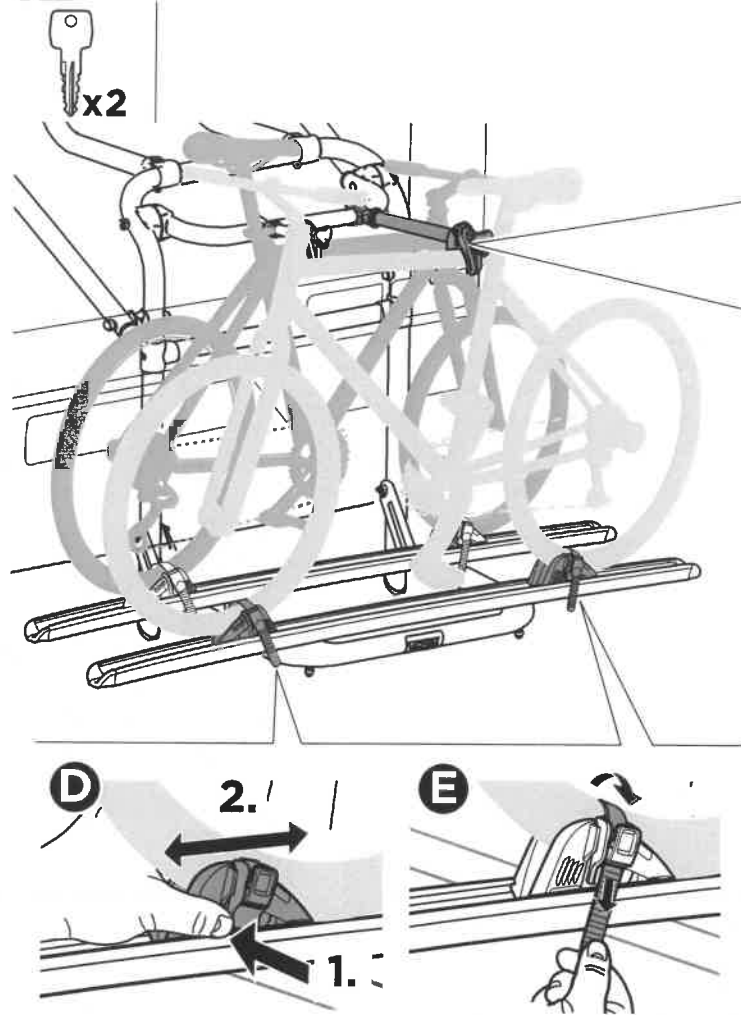


A





B

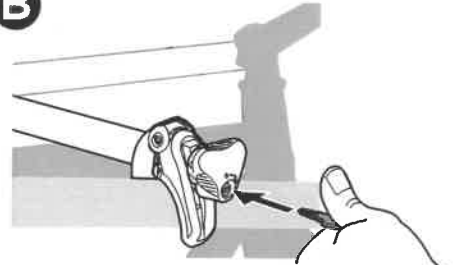


C

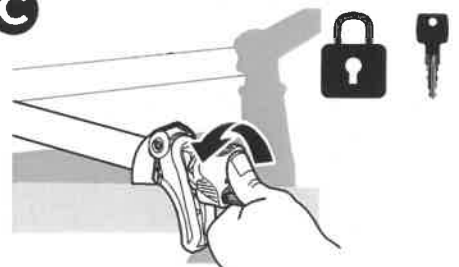


13

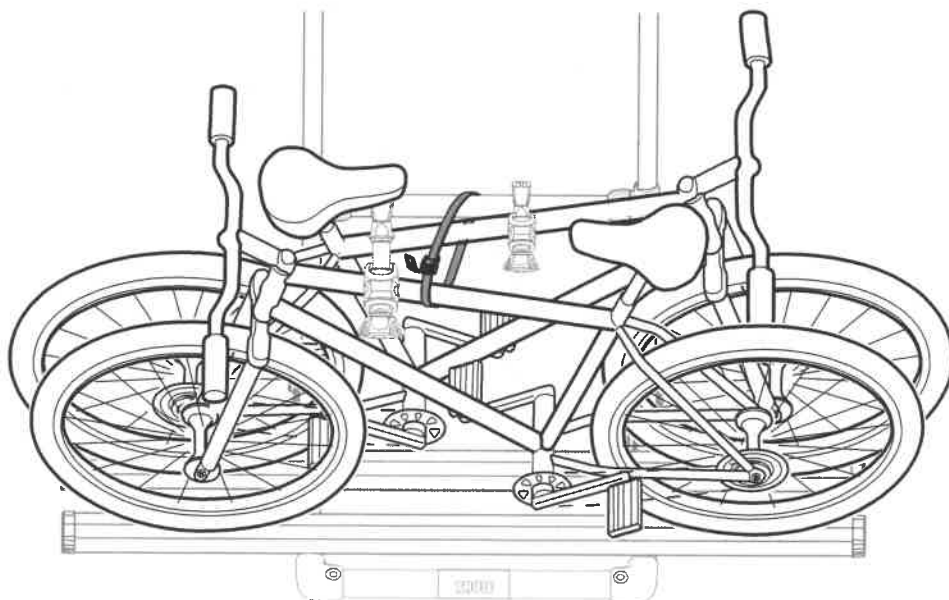



14

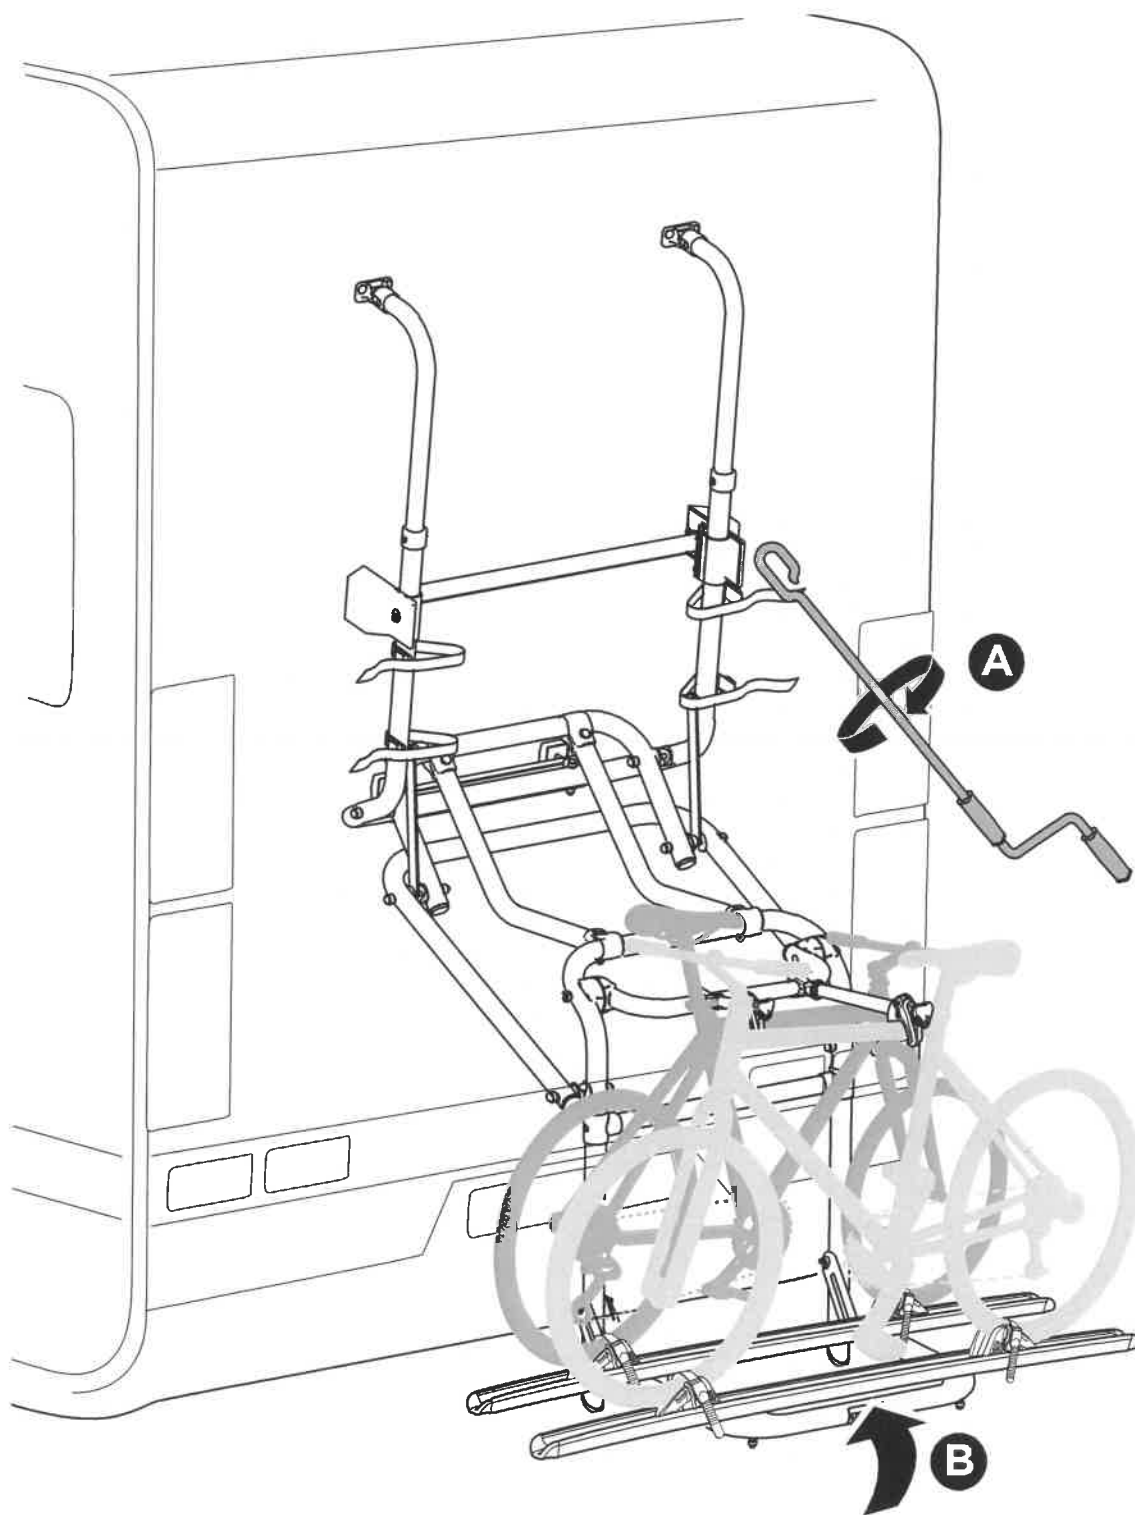

15

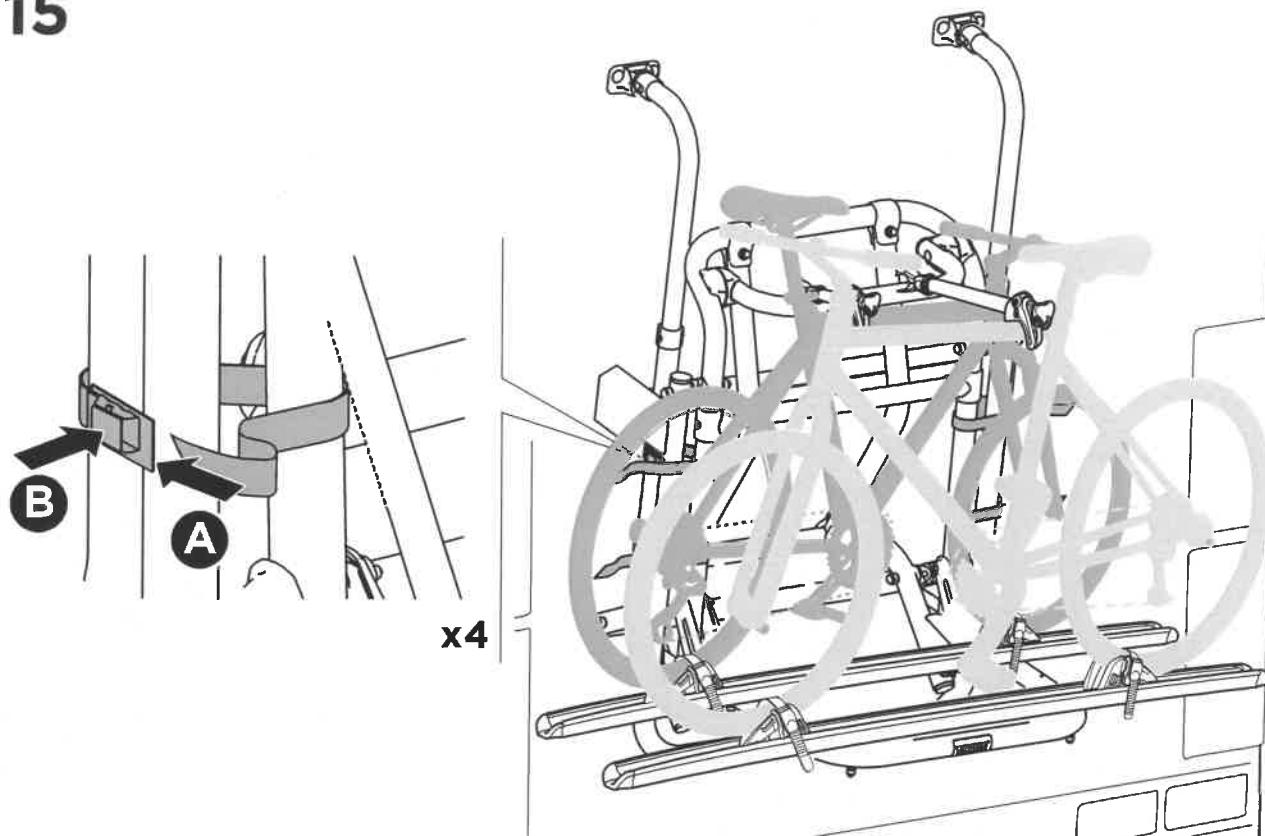

i

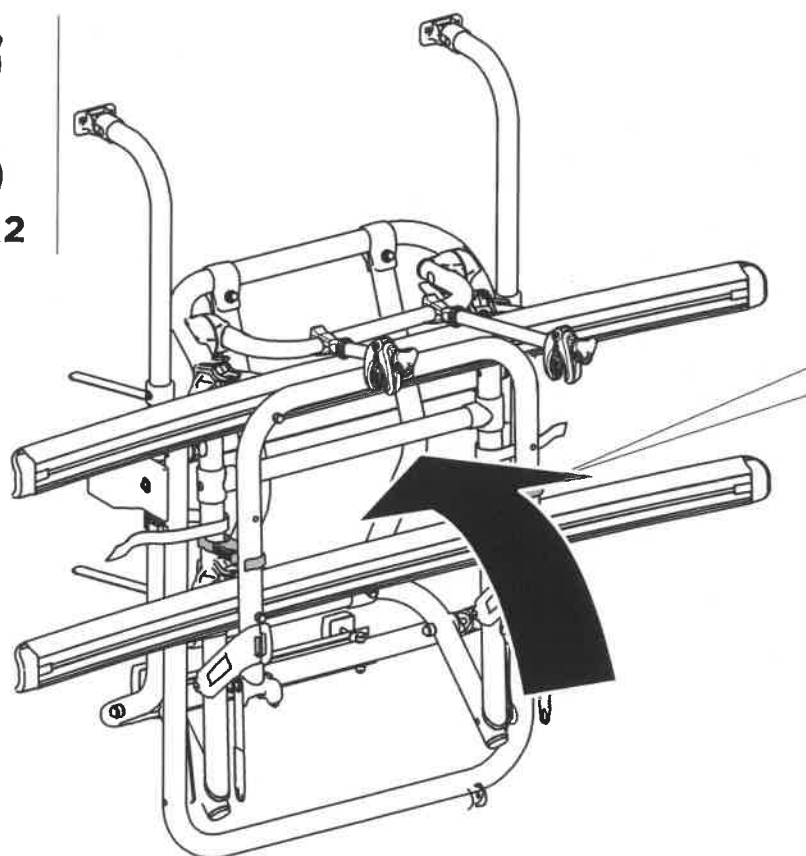

EN Technical specification

Bike-carrier unit weight: 17 kg

Permitted load capacity: max 50 kg

Safety instructions

1. Thule absolves itself of responsibility for any personal injuries or consequential damage to property or wealth caused by incorrect fitting or use.
2. The bike carrier shall be assembled and fitted securely in accordance with the instructions.
- 3.* Firstly check that the wall - where the bike carrier is to be placed - is solid. If not, please reinforce.
4. The bike carrier or the transported goods are not allowed to hide the vehicle's rear light
5. The vehicle driver is solely responsible for ensuring that the product is in faultless condition and that carrier and load is securely fastened.
6. Always position the biggest/heaviest bike first and closest to the car, and then position the smaller/lighter bike.
7. Before departure all loose parts should be taken off the bikes, like childseats, baskets, locks and cycle pumps etc. The bikes should contain no loose items during transport and cause danger to others.
8. Always secure all bikes to the bike carrier frame using the included long strap
9. Check that belts and other fasteners are secure, retighten if necessary.
10. The vehicle's total length increases when the bike carrier is attached. The bikes themselves may increase the vehicle's total width and height. Take especial care when reversing and/or entering garages or ferries etc.
11. Replace any damaged or worn parts immediately.
12. The car's on-road behaviour may change especially when taking curves and during braking when the product is fitted.
13. Applicable speed limits and other traffic regulations shall always be followed.
14. Speed should always be tailored to suit safety considerations with regard to traffic conditions and the load being carried.
- 15.* If projecting more than 40 cm beyond the outer edge of the light emitting surface of the clearance resp. position lamps of the rear mounted carrier, the load shall be provided to the front with a white lamp at the side not more than 40 cm from its edge and not more than 1,5 m above the lane. A red lamp shall be visible towards the rear.
16. For vehicles first type-approved after 1 October 1998, the fitted rear mounted carrier or the transported goods are not allowed to cover the vehicle's third brake light (ISO). The vehicle's brakelight shall be visible from the left and the right sides as follows: relative to the vehicle's longitudinal axis at a 10 degree horizontal angle, upwards; relative to the upper edge of the lamp - at a 10 degree vertical angle downwards, relatively to the lower edge of the lamp at a 5 degree vertical angle. If these values are not met, an optional replacement brake light shall be fitted (Not applicable for roof mounted bike carriers).
17. The carrier is constructed to carry standard-bike-frames. Tandem bikes may not be carried.
18. Modifications to this product are not permitted.
19. Clean the bike carrier regularly using warm water or car shampoo, especially when using/after using at coasts (salt water) or during times when salt on roads is being used (winter).
20. Check that the bikecarrier is securely fitted after driving a short distance (50 km) and thereafter at regular intervals.
21. Keep the instructions safely in the car.

EN Accessories

FR Accessoires

SV Tillbehör

NO Tilbehør

DE Zubehör

IT Accessori

FI Lisävarusteet


PL Akcesoria

NL Accessoires

ES Accesorios

DA Tilbehør

Thule One-Key System

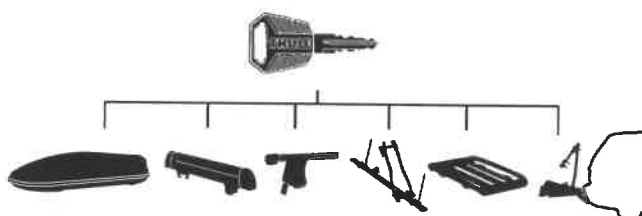

450400  (x4)

450600  (x6)

450800  (x8)

451200  (x12)

451600  (x16)

Lift V16 3rd Rail Kit 307370



Extension Arm 307371

9500 - 15000 mm



Top Mounting Rail 309828



Thule Carbon Frame Protector 984

