



- 1. Make sure you have the latest version of the Mopeka app.
- 2. Open the app.




3. Use the Login button to create a new account, or login to an existing account.

- 4. Plug in the Bridge. Power light will flash for a few seconds then will turn off.
- 5. Press the button on the Bridge, to make the Bridge visible to the app.

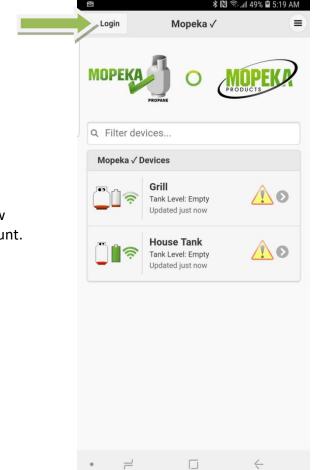

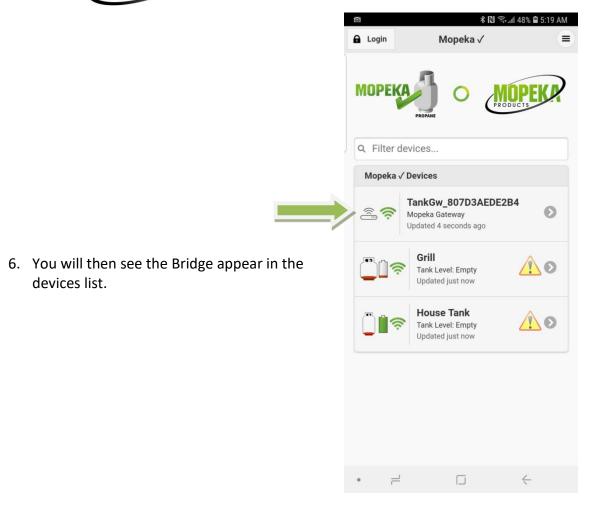

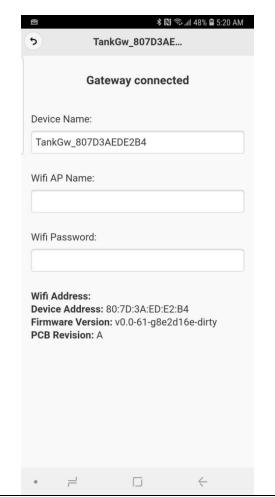

7. Select the Bridge. After a few seconds you will see the Bridge/Wifi connection screen.

8. Type in the case sensitive name and password of your local wifi router.

 The Bridge will then connect to the router. Successful connection will be indicated by an IP address being shown in the 'Wifi Adress' field; and by a solid green light on the wifi symbol of the Bridge. TankGw_807D3AE...

Gateway connected

Device Name:

TankGw_807D3AEDE2B4

Wifi AP Name:

MOORE

Wifi Password:

Wifi Address: 192.168.11.150

Device Address: 80:7D:3A:ED:E2:B4

Firmware Version: v0.0-61-g8e2d16e-dirty
PCB Revision: A

- 10. The Bridge is now connected to the Mopeka cloud.
- 11. Sensor data will automatically be updated at regular intervals to the cloud. When your phone/tablet are not within blue tooth range of the sensor, the app will retrieve the most recent tank level from the cloud.

For support, please email support@mopeka.com; or call 833-MOPEKA1.



Indicator lights on Bridge

Q	Power; will flash when first plugged in to indicate successful power connection.
	Sensor Communications; will flash yellow every time the Bridge sees communication from any sensors.
*	Bluetooth; indicates successful bluetooth communication with the phone/smart device used to setup the Bridge.
(Cloud; indicates successful communication between Bridge and cloud.
•	Wifi; indicates successful connection between Bridge and wifi modem/router.